

# Cessna l-19 (K12) BALSAWOOD AIRPLANE INSTRUCTION MANUAL




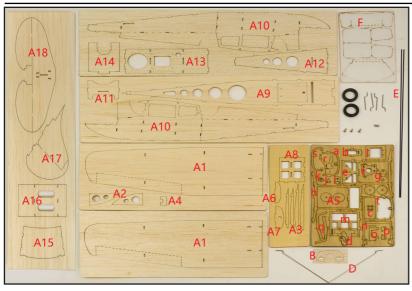



用美工刀从板材下 取下各部件, 然后 参照以下说明步骤 拼装,各部件用 502粘合。

Pls take down the parts from the board by knife,and assemble them as per the procedures as below, we suggest you to stick with 502 glue.

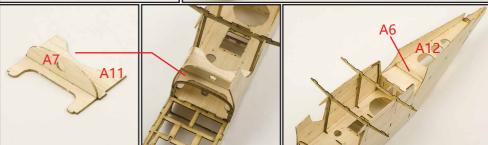

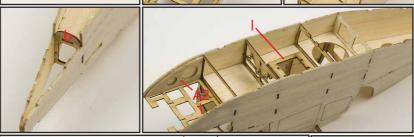







#### 1.机头罩组装 Cowling Installation











方便弯曲。 Use some water for humidification A15 when you stick A15, make easier for bending it.

### 2.机身组装 Fuselage Installation









用少量水湿润方便弯曲。 Use some water for humidifica

convenience for bending.












#### 4.安装马达 Motor Installation








5.安装机轮及起落架 Wheels and landing gear installation








6.安装PVC风挡(从F取下,对比形状粘贴到机身)Install PVC windshield (Take down from F, compare the shape, then glue it on the fuselage.)







7.安装舵机及电子设备 Power System Installation











前后调整电池位置可以 实现对起飞重心的调整

热缩套管 Heat-shrink tube

Adjust battery position front or back to adjust CG of this airplane.





8.飞机重心设计参考 Suggested CG(centre of gravity) for reference.

## **Specification**

Wingspan:445mm Length:320mm Flying Weight:≈35-50g

Suggested Motor: 1104 3700KV Suggested ESC: 1S 5A

Suggested ESC: 1S 5A
Suggested Prop: 4530-5030
Suggested Servo: 1.7g\*2

Suggested BATT: 1S 150-250mAh

WARNING: under 3 years.

## 配置参数



2